


MF 26

0RGRZDZWZRUQLFDORGPDN

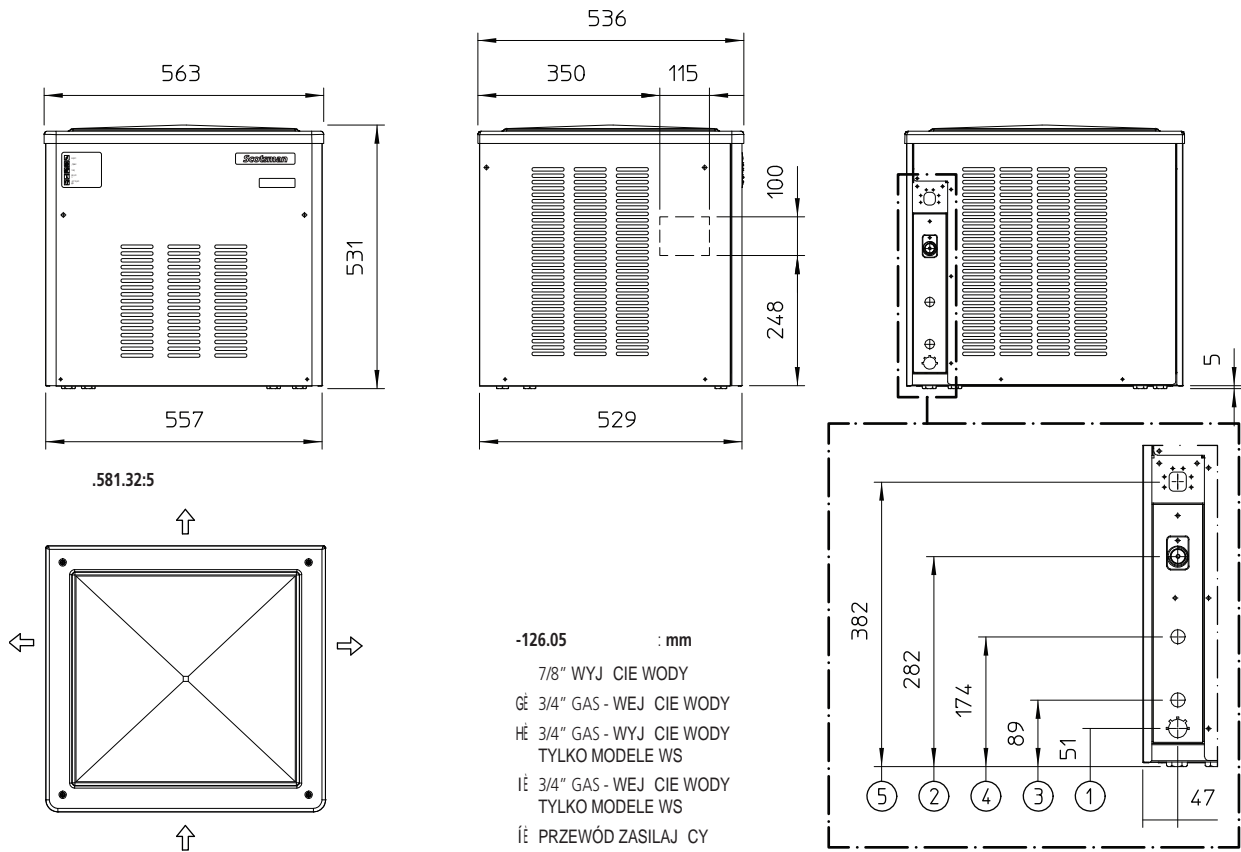

0RGRZDZWZRUQLFDORGPDN

UNIT DATA		Compressor		Circuit wires		Max. fuse size		
		Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	563 x 536 x 531 mm	MF 26 AS	230/50/1	4436	1300	3	1.5	10
Net weight	45 kg	MF 26 AS	115/60/1	4777	1400	3	1.5	10
		MF 26 AS	230/60/1	4436	1300	3	1.5	10
		MF 26 AS	230/60/1	4436	1300	3	1.5	10
		MF 26 WS	230/50/1	4436	1300	3	1.5	10

SHIPPING DATA	
Carton (W x D x H)	630 x 610 x 680 mm
Weight	52 kg

Version	Condensation	Voltage	24 h ice production kg			Energy consumption*		Water usage*	Instant power
			10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h		
MF 26 AS	Air	230/50/1	120	114	95	11.4	10.8	4.6	500
MF 26 AS	Air	115/60/1	140	135	109	12.6	13.7	4.8	650
MF 26 AS	Air	230/60/1	120	114	95	11.4	10.8	4.6	500
MF 26 AS	Air	230/60/1	120	114	95	11.4	10.8	4.6	500
MF 26 WS	Water	230/50/1	120	114	95	10.0	9.5	29.0	400

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions